


### Technical Advice **Multiselector** Penetration seal



- 1 Wall**  
Rigid wall  $\geq 100$  mm
- 2 Seal**  
Maximum seal size  $\leq 1500 \times 2500$  mm
- 3 Penetration**  
Cable trays
- 4 Fire protection product 1**  
Multimastic C System, 2 x 50 mm Multimastic FB1 coated batts with 1 mm coating.

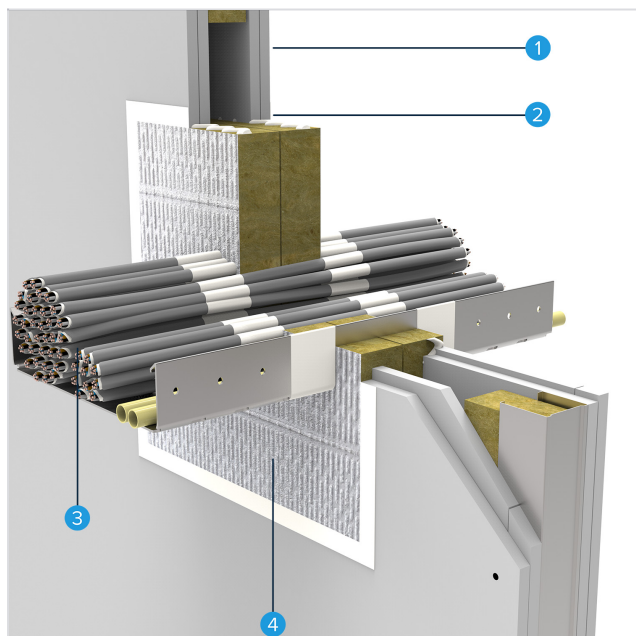

**Fire resistant**  
From both sides



**Classification**  
 $\leq EI 120$



**Download report**  
ETA 23/0050 / page 16




**Download manual(s)**  
Multimastic C


### Mounting Instructions

Apply Multimastic FB firewall(s) glued with Multimastic SP to the structure. Multimastic C fire protection paint may be applied for aesthetic purposes with an overlap  $\geq 25$  mm to the structure. Download [here](#) our [assembly manual](#).


## 3D - view - 1

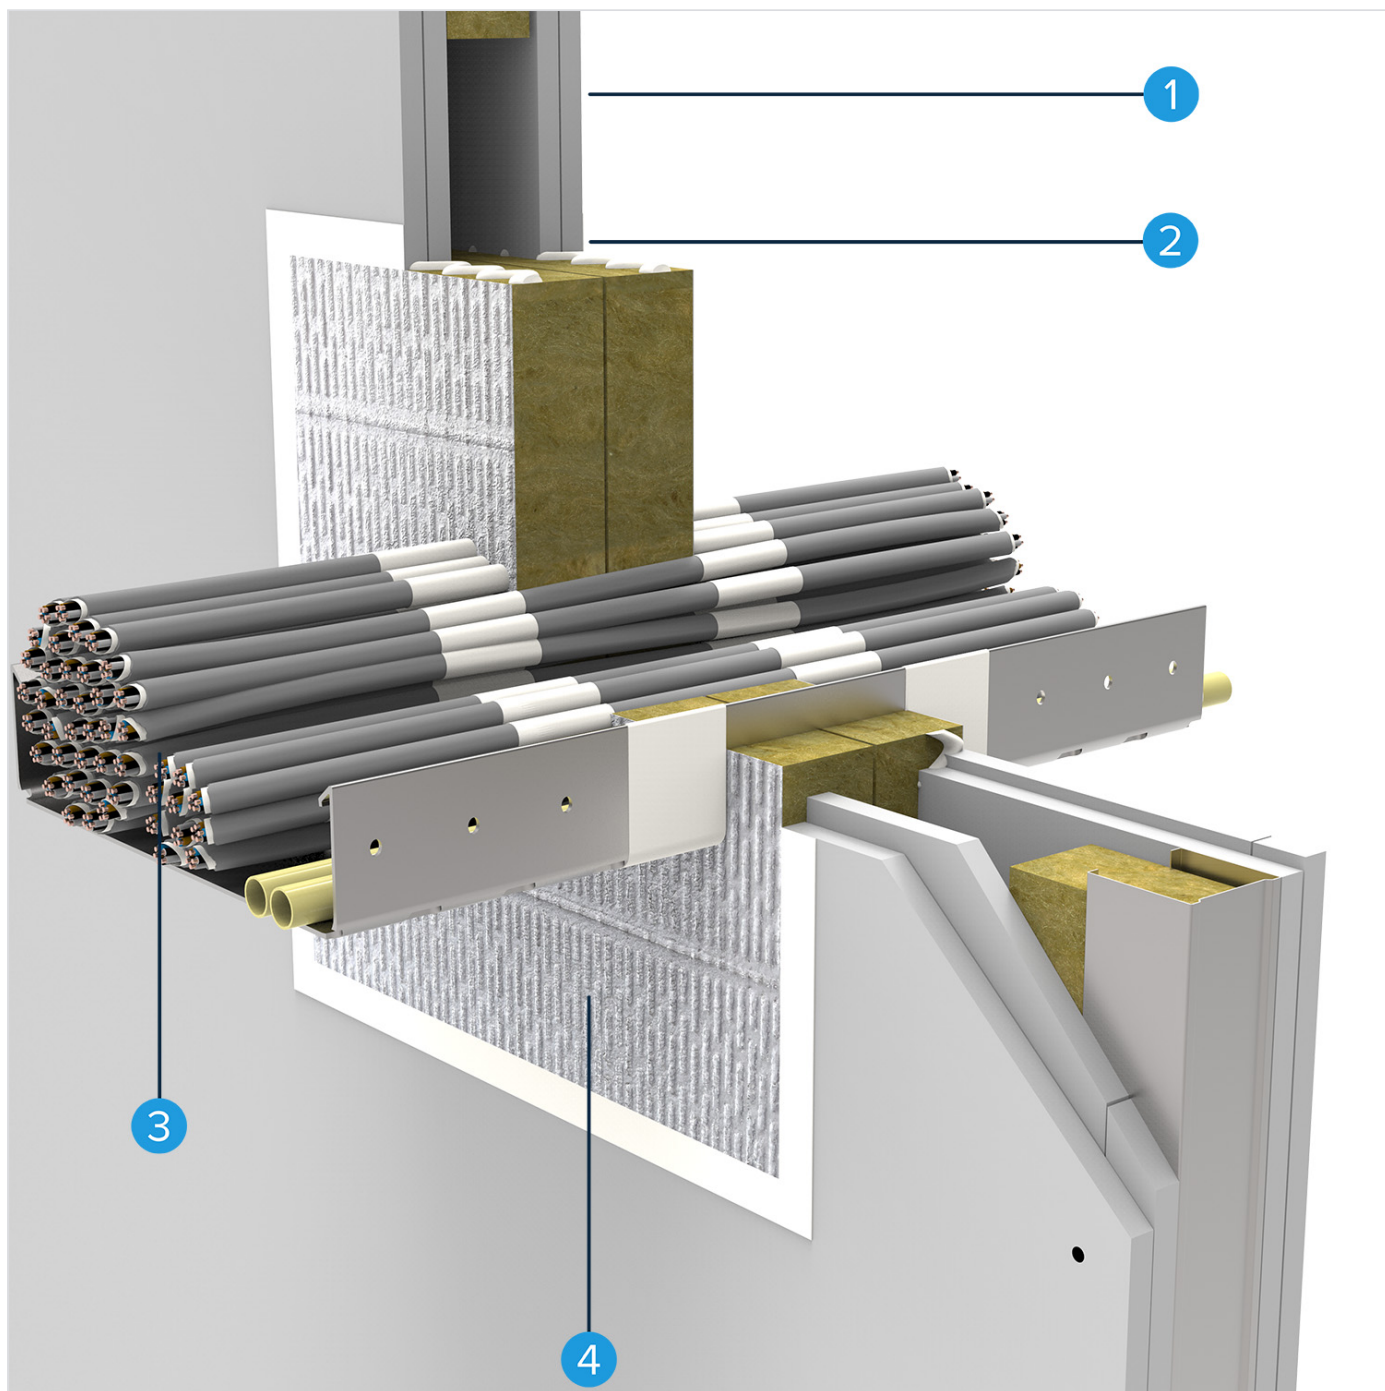

3D - view - 2

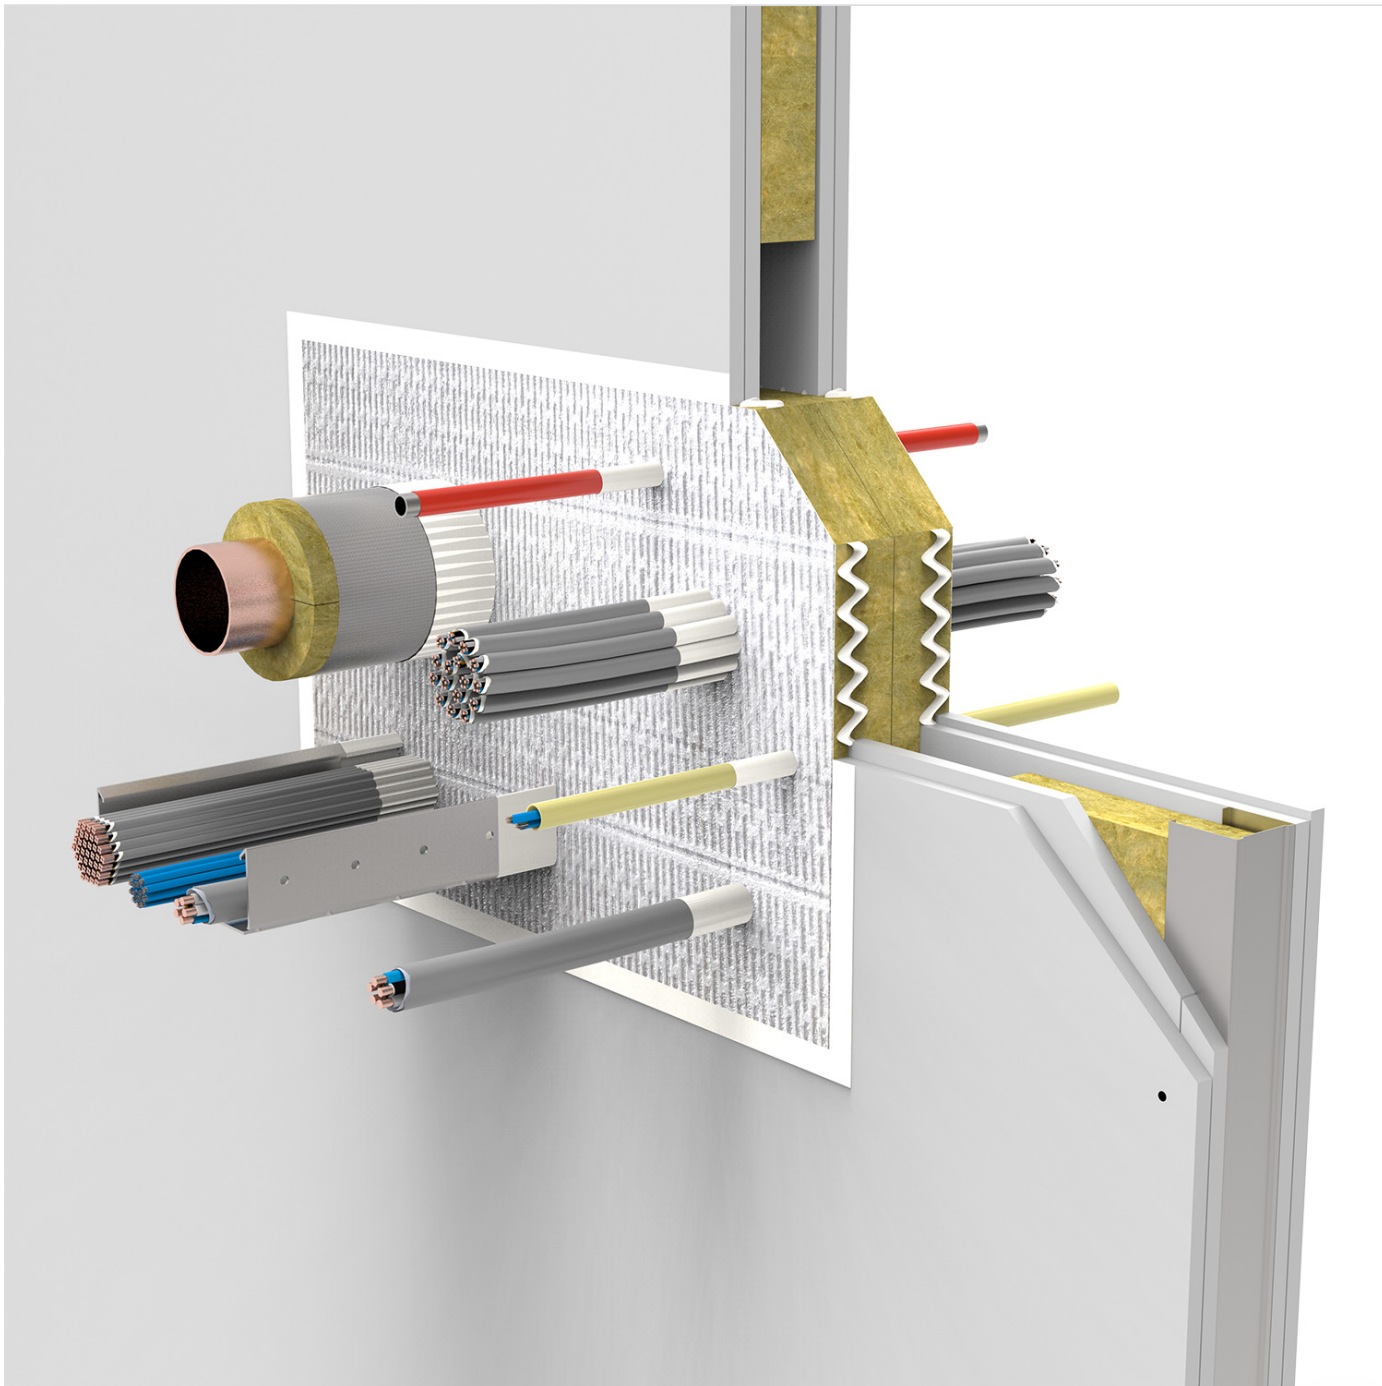

## 2D - view - 1

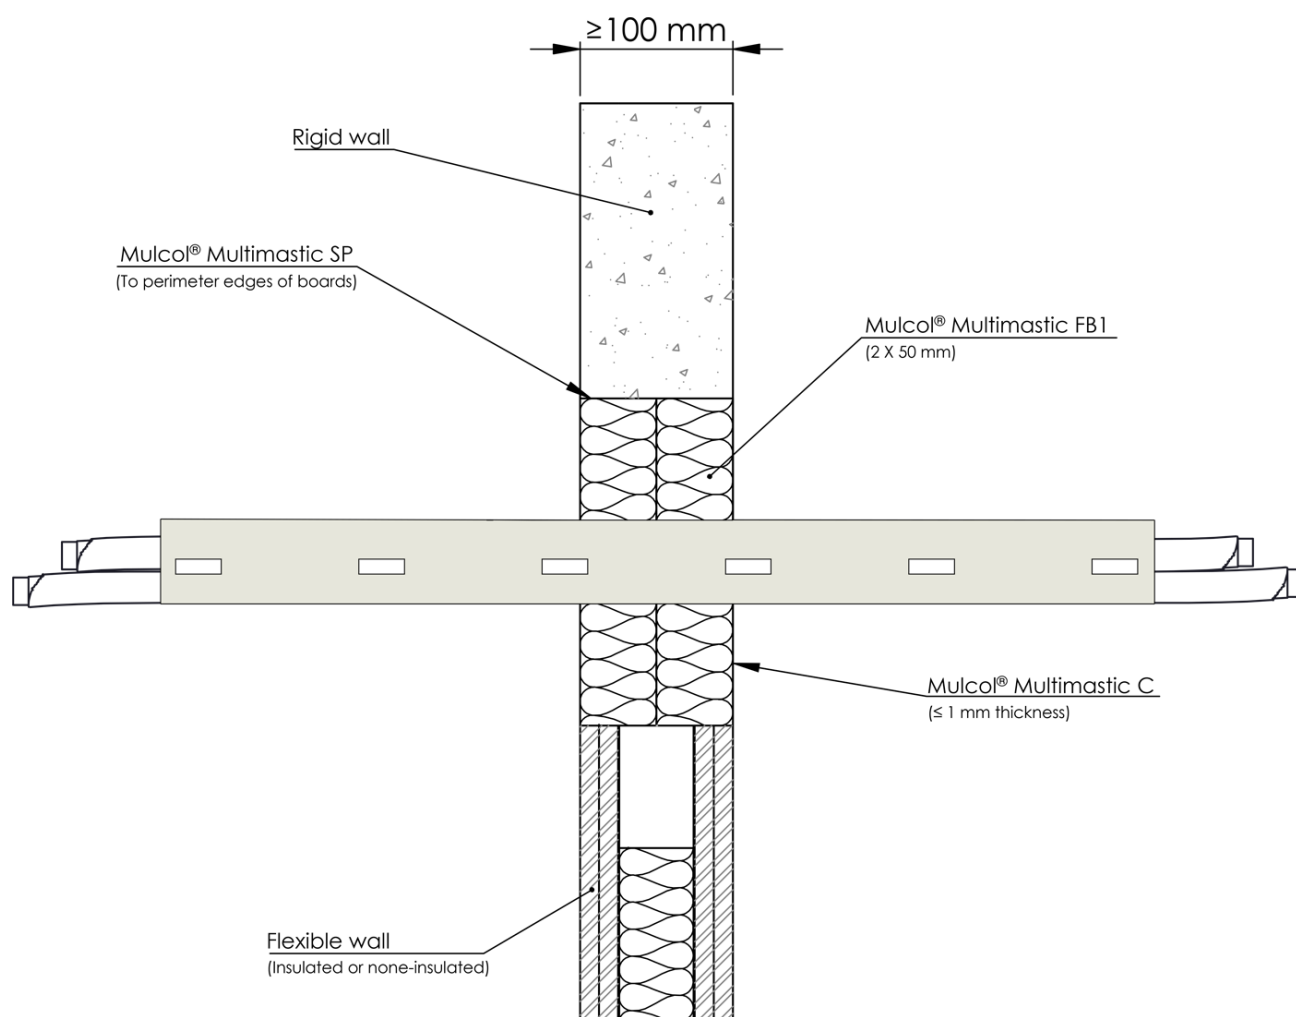

### About us

Mulcol International is a modern manufacturer of innovative passive fire stopping products. Our fundamental objective is to manufacture and test pragmatic, effective and assembly-friendly products and solutions in accordance with the most recent European standards.

### Pragmatic, effective and assembly-friendly solutions

Mulcol International continuously researches, develops and tests practical solutions and products in order to offer our customers the best passive fire safety products. Our aim is to develop innovative fire-retardant products and solutions that are relevant and easy to use. Instead of testing theoretic solutions, we feel that we have to gauge if our tested products can be used in practice and reflect real situations.

### Excellent quality

Mulcol International has only one goal and that is to offer products of an excellent quality, designed for our safety. We want to be market leaders in manufacturing and supplying the best performing passive fire protection products. Mulcol International exclusively focuses on sophisticated technologies and our expertise with regard to the character of our products. We focus on expanding the performances and characteristics of the existing range of passive fire safety products.

### © Mulcol Multiselector

All statements from the Mulcol Multiselector are based on current regulations and techniques and have been published in the best possible detail. The test reports and certificates pertaining to the published constructions or scientific publications on which the information is based shall be decisive in all cases.

Mulcol International BV has taken the utmost care to create this application. Nevertheless, any errors and imperfections cannot be excluded. The publisher excludes all liability for direct and indirect damage, partly for the benefit of all those who have participated in this application.

All rights reserved. No part of this publication may be reproduced, stored in an automated database and/or made public in any form or by any means, whether electronic, mechanical, photocopying, recording or otherwise - without the prior written permission of the publisher.

### Mulcol International BV

Promenade 75  
5401 GM Uden  
+31 (0)118 72 61 40  
info@mulcol.com  
www.mulcol.com

